



Custom Service & Design, Inc.

P.O. Box 214923
Auburn Hills, MI 48321


Phone: 248.340.9005
Fax: 248.340.9002

www.customserviceanddesign.com

BULLETIN: SSEL01-1

CARTRIDGE LENGTH				END CONFIGURATION		
9-3/4	19-1/2	29-1/2		DOE = Double open end, with seals		
9-7/8	20	30	SOE = Single open end, with seal			
10			222 = Twin O-ring*			
MICRON RATING			1NPTM = Male NPT, 1-in.*			
840	190	75	1NPTF = Female NPT, 1-in.*			
540	150	40	ELEMENT MATERIAL			
370	120	20	S = 304 stainless steel			
280	100	10	S316 = 316 stainless steel			
230	80	5	SEAL MATERIAL			
CONSTRUCTION			B = Buna-N			
Pleated	= P		E = Ethylene Propylene			
Cylindrical	= C		V = Viton®			
* Opposite end closed			T = Teflon®			

Dimensions (IN)

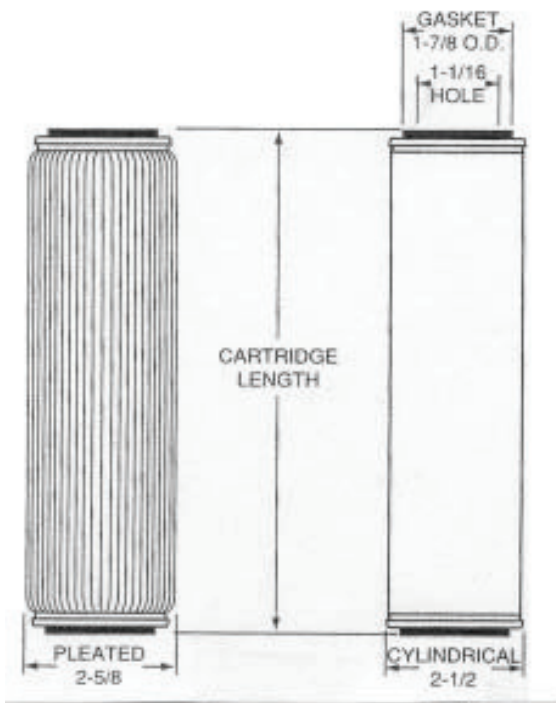

Pleat Protectors

Pleat protectors prevent accidental denting of pleat forms that reduce filter area. Made of stainless steel with 1/4-in. dia. perforations, they are held in place by bending tabs at the top and bottom. When ordering give nominal length (10, 20, or 30 inches) and material (304 or 316 stainless steel).

