



CARTRIDGE LENGTH		
9-3/4	19-1/2	29-1/2
9-7/8	20	30
10		

MICRON RATING		
840	190	75
540	150	40
370	120	20
280	100	10
230	80	5

CONSTRUCTION
 Pleated = P
 Cylindrical = C


* Opposite end closed

END CONFIGURATION
DOE = Double open end, with seals
SOE = Single open end, with seal
222 = Twin O-ring
1NPTM = Male NPT, 1-in.
1NPTF = Female NPT, 1-in.

ELEMENT MATERIAL
S = 304 stainless steel
S316 = 316 stainless steel

SEAL MATERIAL
B = Buna-N
E = Ethylene Propylene
V = Viton®
T = Teflon®

Dimensions (IN)

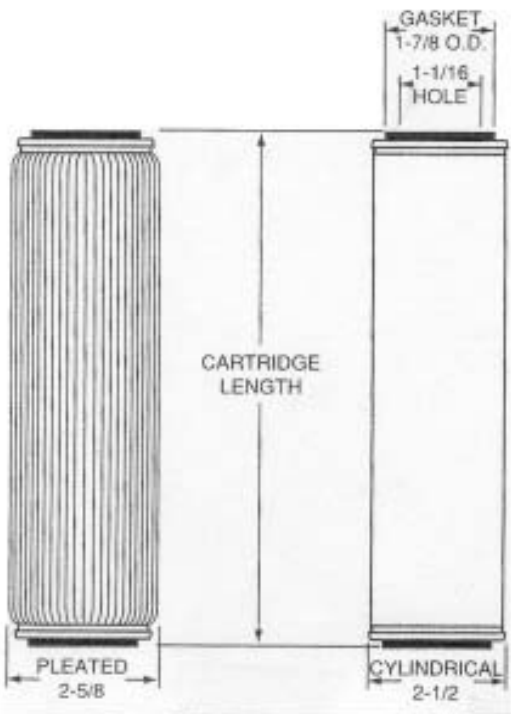

Pleat Protectors

Pleat protectors prevent accidental denting of pleat forms that reduce filter area. Made of stainless steel with 1/4-in. dia. perforations, they are held in place by bending tabs at the top and bottom. When ordering give nominal length (10, 20, or 30 inches) and material (304 or 316 stainless steel).

