

Phone: 248.340.9005 Fax: 248.340.9002

www.customserviceanddesign.com

C-10 CARTRIDGE BULLETIN: C10-14

CARTRIDGE VESSEL

CSD'S HIGH FLOW C-10 VESSEL DESIGN SETS THE INDUSTRIAL STANDARD.

- \Rightarrow All stainless steel Construction
- \Rightarrow Four Bolt LID Hold down design
- \Rightarrow Positive element sealing design
- ⇒ MICRON RATINGS AVAILABLE: 0.35, 1 3, 10, 20, 50, 100
- $\Rightarrow \text{ Vessel seals independent of } \\ \text{element}$

THE C-10 CARTRIDGE MODEL, DESIGNED & MANUFACTURED BY CSD, OFFERS INNOVATIVE TECHNOLOGY & EXCEPTIONAL QUALITY.


STANDARD FEATURES:


- \Rightarrow All 304L Stainless Steel Construction
- \Rightarrow Vent (1 PC), gauge & drain Ports (2 PCS EA)
- \Rightarrow Floor mount base plate
- \Rightarrow Proprietary element design 130 sq ft
- \Rightarrow 150 PSI rated
- \Rightarrow Single vessel seal, bolted Lid design
- \Rightarrow BEAD BLAST FINISH
- \Rightarrow NPT (F) OR 150# RF FLANGES
- \Rightarrow 1 1/2 or 2" in/out connections

OPTIONS:

- \Rightarrow Inlet / outlet locations
- \Rightarrow VICTAULIC & SANITARY CONNECTIONS
- \Rightarrow Electropolished finish
- \Rightarrow Seal materials
- \Rightarrow Element design, function
- \Rightarrow DUPLEXING OR MULTIPLEXING



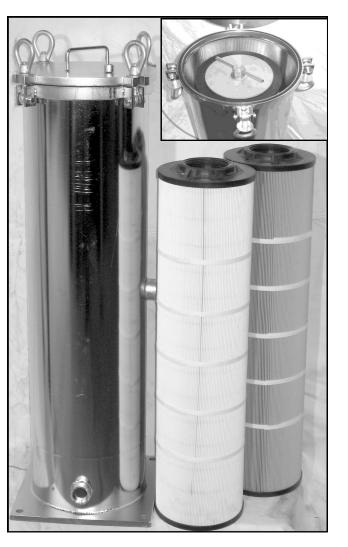

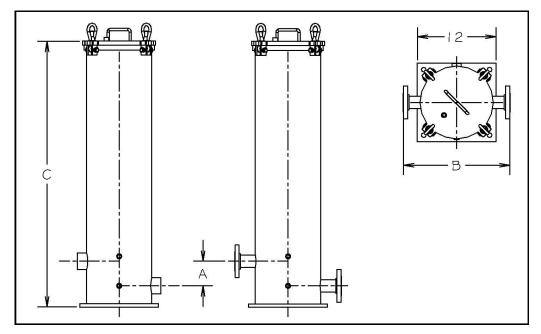

HOUSING / Element Length	Port	А	В	с	
040	1 1/2" NPT	3 3/4"	12 3/4"	40 5/8"	
C10	2" NPT	3 3/4"	12 1/6"	40 5/8"	
C10	1 1/2" Flange	3 3/4"	16 1/4"	40 5/8"	
	2" FLANGE	3 3/4"	16 3/16"	40 5/8"	

* Overhead Clearance to Remove 30" Element

BUILD A CSD PART NUMBER

С	10	01	28	4L	020	Ν	2	В	4
Түре	VESSEL SIZE	# OF BASKETS / ELEMENTS	Element Length	# OF LUGS	CONNECTION SIZE	CONNECTION STYLE	IN / OUT LOCATION	SEALS	MATERIAL



PHONE: 248.340.9005 FAX: 248.340.9002



www.customserviceanddesign.com

Pour